




Conductor Hardware >> Connectors  
Steel Guy wire, StrandVise®

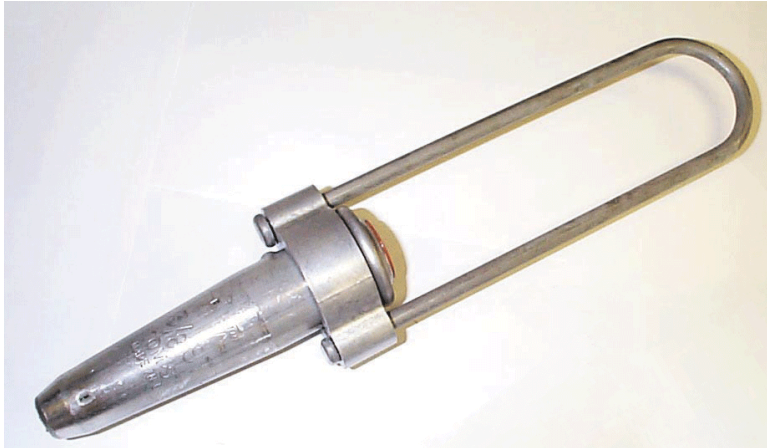



### Features:

- Rated to hold a minimum of 90% of RBS of the strand used

### Application:

- For deadend applications with overhead or down guy wire.
- "Universal Grade" are recommended for use with Alumoweld, Aluminized, and EHS Galvanized Steel.
- "All Grades" are recommended for use on Common Grade, Siemens-Martin, High Strength Utility Grade, Galvanized and Aluminized steel strand.

[Click here for PDF Drawing of StrandVise Products](#)

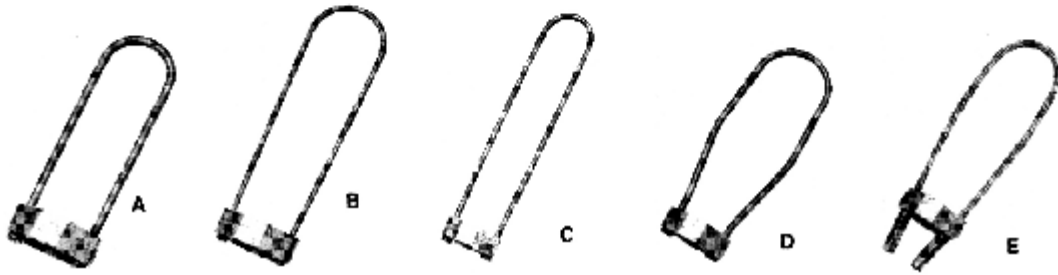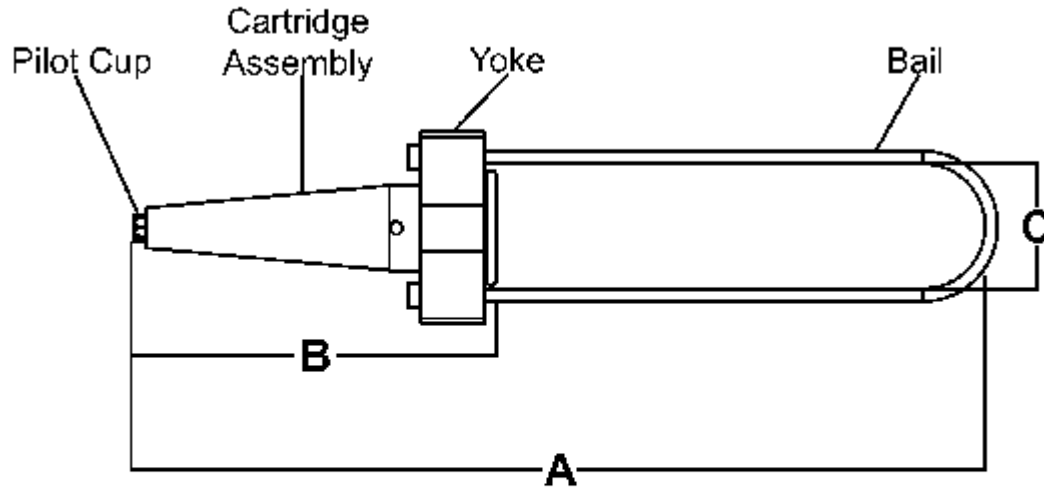

**Primary Strand Application: 3/16"**  
**Wire Range: .145 - .215**

3/16" Universal Grade Strand					
Catalog Number	A	B	C	Bail Type	Standard Pack
5199	10.12	4.66	1.63	A	50
5255	12.75	4.66	2.75	E	25
5261	22.31	4.66	2.75	E	25

Notes:

**Primary Strand Application = 1/4"**  
**Wire Range = .215-.270**

1/4" Universal Grade Strand					
Catalog Number	A	B	C	Bail Type	Standard Pack
5200	10.38	4.88	1.63	A	50
5250	13.87	4.88	2.25	B	50
5200L	13.87	4.88	1.63	C	50
5262	22.62	4.88	2.75	E	25
5268	28.63	4.88	2.75	E	25

Notes:

**Primary Strand Application = 5/16"**  
**Wire Range = .270-.315**

5/16" Universal Grade Strand					
Catalog Number	A	B	C	Bail Type	Standard Pack
5201	10.69	5.38	1.63	A	50
5251	14.00	5.38	2.25	B	50
5201L	15.75	5.38	1.63	C	50
5257	14.06	5.38	2.75	E	20
5263	23.44	5.38	2.75	E	25
5269	29.69	5.38	2.75	E	20

Notes:

**Primary Strand Application = 3/8"**  
**Wire Range = .325-.392**

3/8" Universal Grade Strand					
Catalog Number	A	B	C	Bail Type	Standard Pack
5202	12.88	6.47	1.63	A	25
5252	15.12	6.47	2.25	B	25
5252-6	15	6.47	2.75	D	25
5202L	18.00	6.47	2.00	C	25
5264	25.00	6.47	2.75	E	20
5270	31.00	6.47	2.75	E	20

Notes:

**Primary Strand Application = 7/16"**  
**Wire Range = .392-.455**

7/16" Universal Grade Strand					
Catalog Number	A	B	C	Bail Type	Standard Pack
5203	14.75	6.72	2.06	A	25
5253-6	17.25	6.72	2.75	D	25
5203L	21.00	6.72	2.00	C	25

Notes:

**Primary Strand Application = 1/2"**  
**Wire Range = .455-.520**

1/2" Universal Grade Strand					
Catalog Number	A	B	C	Bail Type	Standard Pack
5204	16.31	7.09	2.06	A	20
5254	17.50	7.09	2.00	B	20
5254-6	17.38	7.09	2.75	D	20
5204L	20.50	7.09	2.00	C	20

Notes:

**Primary Strand Application = 3/16"**  
**Wire Range = .185-.193**

3/16" All Grades Strand					
Catalog Number	A	B	C	Bail Type	Standard Pack
5099	8.06	2.97	1.63	A	50

Notes:

**Primary Strand Application = 1/4"**  
**Wire Range = .240-.253**

1/4" All Grades Strand					
Catalog Number	A	B	C	Bail Type	Standard Pack
5100	9.56	3.94	1.63	A	50
5150	12.82	3.94	2.25	B	50
5100-L	13.10	3.94	1.63	C	25

Notes:

**Primary Strand Application = 5/16"**  
**Wire Range = .310-.335**

5/16" All Grades Strand					
Catalog Number	A	B	C	Bail Type	Standard Pack
5101	9.88	4.37	1.63	A	50
5151	13.10	4.37	2.25	B	50
5101L	14.90	4.37	1.63	C	25

Notes:

**Primary Strand Application = 3/8"**  
**Wire Range = .360-.405**

3/8" All Grades Strand					
Catalog Number	A	B	C	Bail Type	Standard Pack
5102	11.88	5.00	1.63	A	50
5152	13.82	5.00	2.25	B	50
5152-6	13.50	5.00	2.875	D	25
5102L	17.00	5.00	1.63	C	25

Notes:

[www.maclepower.com](http://www.maclepower.com)

