



16,000 lb. Series Guy Strains - Clevis / Thimble

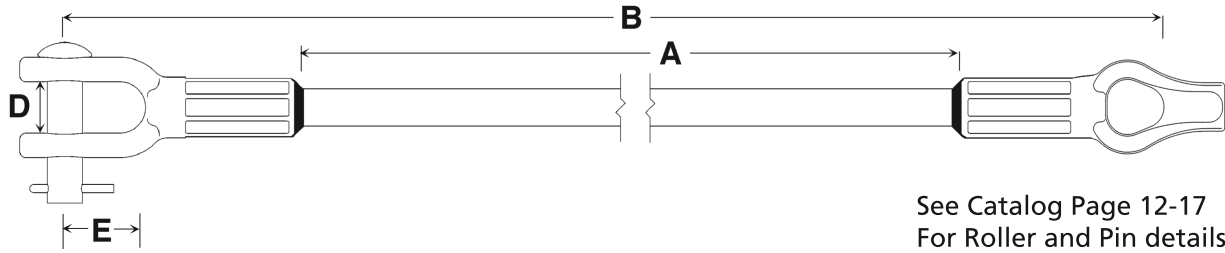

See Catalog Page 12-17
For Roller and Pin details

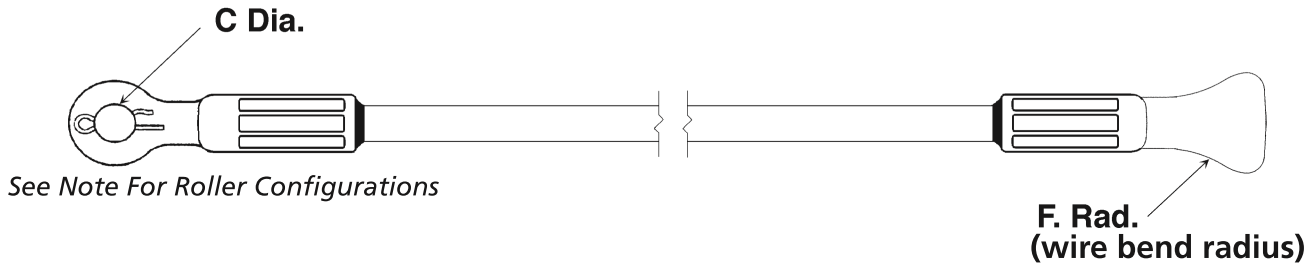

See Note For Roller Configurations

F. Rad.
(wire bend radius)

C Dimension is 5/8" (16 mm)
D Dimension is 0.9" (23 mm)
E Dimension is 1.4" (36 mm)

5/8" dia. Fiberglass rod.

Castings are hot-dip galvanized ductile iron.

RUS Accepted.

Catalog Number	Length A	Length B	Radius F	Weight (Each)
16,000 lbs. (7258 kg) Minimum Ultimate Strength*				
GS16012CT	12" (30.5 cm)	19.6" (49.8 cm)	0.75" (19 mm)	2.8 lbs. (1.3 kg)
GS16024CT	24" (61.0 cm)	31.6" (80.3 cm)	0.75" (19 mm)	3.1 lbs. (1.4 kg)
GS16036CT	36" (91.4 cm)	43.6" (110.7 cm)	0.75" (19 mm)	3.3 lbs. (1.5 kg)
GS16054CT	54" (137.2 cm)	61.6" (156.5 cm)	0.75" (19 mm)	3.7 lbs. (1.7 kg)
GS16078CT	78" (198.1 cm)	85.6" (217.4 cm)	0.75" (19 mm)	4.2 lbs. (1.9 kg)

GS—CT series has No Roller as detailed in drawing

For 1 Roller, replace "CT" in number with "CT1"

Consult factory for additional lengths.

Add "SC" suffix to the end of the catalog number to denote Silicone Coated rod

*Recommended maximum working load is 50% of minimum ultimate ratings listed.

